

HIKUT SEMI W10

Product Description


HIKUT SEMI W10 is a semi-synthetic soluble metalworking fluid which forms a light yellow emulsion with water. This product has high resistance to bacteria and fungi. It is suitable for cooling and lubricating for light to medium duty especially grinding and turning processes.

Benefits

- Very good cooling property, prevents spot welding of workpieces and tools
- Good lubricity
- High resistance against bacteria and fungi

Applications

- Suitable for lubricating and cooling for general machining processes which are light to medium operational severity and require long service life
- Mix 5% with water for honing and grinding processes
- Mix 5-6% with water for turning and milling processes

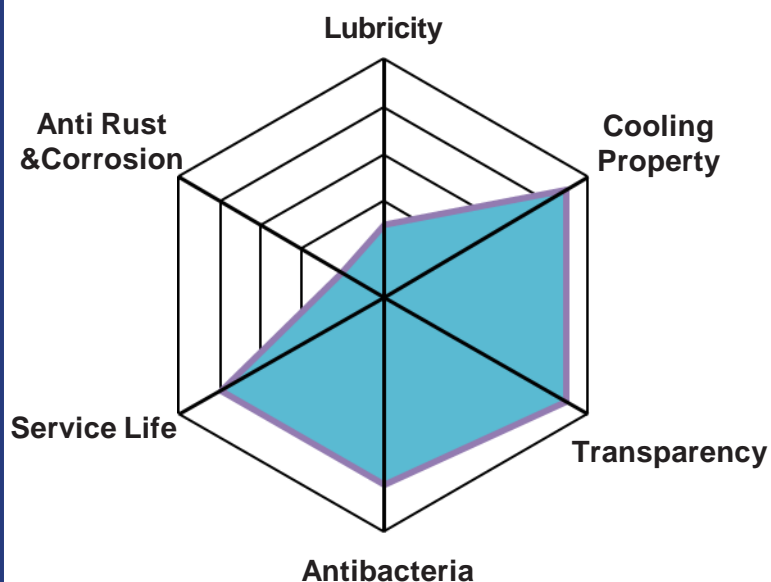

The Moving Innovation 

HIKUT SEMI W10

Typical Characteristics

Tests	Methods	Units	Results
Appearance	Visual Inspection		Brown
Appearance after mixed with water	Visual Inspection		Clear light yellow
Kinematic Viscosity at 40 °C	ASTM D445-11	mm ² /s	10.04
Emulsion Stability	IP 263		Pass
Rust Test	IP 287	% Break Point	3.0
pH Value	pH Meter		9.8
Nitrate / Nitrite	-		None
Chlorine	-		None
Corrective Factor (Refractometer)	Refractometer		3.4

Maintenance

- Mix with clean water containing water hardness 150-400 ppm
- Always maintain the concentration of fluid as controlled
- Daily remove tramp oil on surface to prevent bacteria growth

Health and Safety

This product shows no significant health or safety hazard when used under the recommended applications and suitable handling.

Avoid the direct contact. Wash immediately after contact. Health and safety information is available on the Safety Data Sheet (SDS) which can be obtained from <http://pttlubricants.pttor.com>



The product can cause some skin irritation and has flash point higher than 93.4°C

Note: Data and information contained in this publication are based on standard test under laboratory conditions and/or performance test. To consider the use of PTT Lubricants' products in particular application, customer is responsible for determining whether product and information are appropriate for customer conditions or should consult with PTT Lubricants' technical service division. The procedure of using any lubricant may differ or change depended on different machines and their manuals. Therefore, we recommend to read, understand and review the latest SDS in order to ensure the use of product is accomplished safety.

The Moving Innovation 